



## Slim concealed ceiling unit Ducted - VRV indoor unit

### FXDQ-A

#### Applications from hotels to retail to offices

The slim concealed unit has a very wide range of capacities to suit an array of applications from hotels to retail to offices.



The Daikin VRV indoor unit range is one of the widest on the market, offering no less than 26 stylish and elegant models in 116 different variants – all designed to maximise comfort, minimise operating noise and simplify installation and servicing.

Designed to fit rooms of any size and shape, Daikin indoor units are also user friendly, ultra reliable, easy to control and quiet in operation.

All indoors units comply with the Ecodesign legislation by adopting DC fans in all indoor units, improving their energy efficiency.

#### Features and benefits:

- > Compact dimensions, can easily be mounted in a ceiling void of only 240mm
- > Blends unobtrusively with any interior décor: only the suction and discharge grilles are visible
- > 15 class unit especially developed for small or well-insulated rooms, such as hotel bedrooms and small offices
- > Low energy consumption thanks to DC inverter fans
- > Medium external static pressure means units can be used with flexible ducts of varying lengths
- > Standard drain pump with 750mm lift

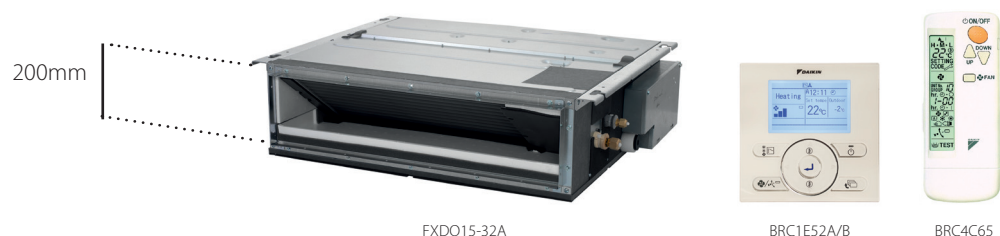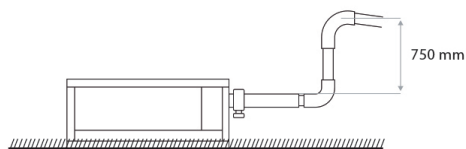

FXDQ15-32A

BRC1E52A/B

BRC4C65

## FXDQ-A

Indoor unit				FXDQ15A	FXDQ20A	FXDQ25A	FXDQ32A	FXDQ40A	FXDQ50A	FXDQ63A
Cooling capacity	Nom.		kW	1.7	2.2	2.8	3.6	4.5	5.6	7.1
Heating capacity	Nom.		kW	1.9	2.5	3.2	4.0	5.0	6.3	8.0
Power input - 50Hz	Cooling	Nom.	kW	0.071				0.078	0.099	0.110
	Heating	Nom.	kW	0.068				0.075	0.096	0.107
Casing Colour				Galvanised steel / Non painted						
Dimensions	Unit	H x W x D	mm	200x750x620			240	200x950x620		200x1,150x620
Required ceiling void >							240			
Weight	Unit			22				26		29
Fan-Air flow rate - 50Hz	Cooling	High/Nom./Low	m <sup>3</sup> /min	7.5/7.0/6.4	8.0/7.2/6.4			10.5/9.5/8.5	12.5/11.0/10.0	16.5/14.5/13.0
Fan-External static pressure - 50Hz	High/Nom.		Pa	30/10				44/15		
Sound power level	Cooling	Nom.	dB(A)	50	51			52	53	54
Sound pressure level	Cooling	High/Nom./Low	dB(A)	32/31/27	33/31/27			34/32/28	35/33/29	36/34/30
Refrigerant	Type			R-410A						
Piping connections	Liquid/OD/Gas/OD/Drain		mm	6.35/12.7/VP20 (I.D. 20/O.D. 26)						9.52/15.9/VP20 (I.D. 20/O.D. 26)
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/ 220-240						
Current - 50Hz	Maximum fuse amps (MFA)		A	16						

## Options &amp; accessories

Adapters and controls	FXDQ 15~63A
BRC1E52A/B Premium wired remote control with full text interface and back light	•
BRC1D52 Standard wired remote control with weekly timer	•*4
Infrared remote control including receiver	BRC4C65
BRC2E52A Simplified wired remote control for heat recovery	•
BRC3E52A Simplified wired remote control for heat pump	•
DCS302C51 Central remote control	•
DCS301B51 Unified ON/OFF control	•
DST301B51 Schedule timer	•
DCM601A51 Intelligent Touch Manager	•
External wired temperature sensor	KRCS01-4B
External wireless temperature sensor	K.RSS
Adaptor for wiring (interlock for fresh air intake fan)	-
Wiring adapter for external monitoring/control via dry contacts and setpoint control via 0-140 Ω	KRP4A54
Wiring adapter for external central monitoring / control (controls 1 entire system)	KRP2A53
Wiring adapter with 4 output signals (compressor / Error, Fan, Aux. heater, Humidifier output)	KRP1B56
Wiring adapter with 2 output signals (compressor / Error, Fan)	-
Adapter for multi-tenant (24VAC PCB power interface)	DTA114A61
External control adapter for outdoor unit	DTA10A53
Installation box / Mounting plate for adapter PCBs (For units where there is no space in the switchboard)	KRP1B101
Connector for forced-off contact	-
Connection to centralised control	-
Electrical box with earth terminal (2 blocks)	KJB212A
Electrical box with earth terminal (3 blocks)	KJB311A
Electrical box with earth terminal	-
Digital input adapter	-

Other options	FXDQ 15~63A
Decoration panel (obligatory for cassette units, optional for others, rear panel for FXLQ)	-
Kit for mounting of decoration panel direct onto unit	-
Panel spacer for reducing required installation height	-
Sealing kit for 3-directional or 2 directional air discharge	-
Fresh air intake kit	-
Air discharge adapter for round duct	-
Filter chamber for bottom suction	-
Replacement long life filter	-
Drain pump kit	standard
Sensor kit	-
Noise filter (for electromagnetic use only)	KEK26-1A

\*4 Not recommended because of the limitation of the functions

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin UK. Daikin UK has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin UK explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin UK.



Daikin Europe N.V. participates in the Eurovent Certification programme for Air conditioners (AC), Liquid Chilling Packages (LCP), Air handling units (AHU) and Fan coil units (FCU). Check ongoing validity of certificate online: [www.eurovent-certification.com](http://www.eurovent-certification.com) or using: [www.certiflash.com](http://www.certiflash.com)